RH16

Mini Dock Leveller

with 400 mm Hinged Lip and Silent Technology.

Technical Description.

The **RH16 Silent Dock Leveller,** with a 400 mm hinged lip, is a solution designed for loading and unloading operations, supporting **up to 6,000 kg dynamic load capacity**. It features a 6/8 mm chequer plate platform and a hydraulic system with safety fall protection valve.

It provides safety, durability and low maintenance requirements.

It is particularly **suitable for supermarkets** or **retail facilities** that require loading and unloading operations to be carried out **quietly**, **safely** and **efficiently**.

Technical Features and Performance.

• **Plataform**	6/8 mm chequer plate Anti-slip upper surface
• **Swing/hinge lip**	13/15 mm thickness Hinged lip bevelled at the edge Reinforced self-cleaning flat hinges
• **Finishes**	Painted in Anthracite Grey (RAL 7016)
• **Load capacity**	6 tonnes
• **Sizes**	L 1000 x (W 1800/2000/2200) x H 600 mm
• **Other features**	Emergency manual pump Sound-insulated hydraulic power unit enclosure Adjustable support legs from 110 to 1300 mm Fully pre-mounted and pre-wired assembly

Options.

In addition to the standard technical specifications of the dock levellers, the following options are available*:

- Galvanised Steel
- Painted in any RAL colour
- Removable perforated guardrails (improved visibility)

For other options and dimensions, please contact our sales team.

The **Inkema RH16 Dock Leveller** with hinged lip complies with European standard **EN 1398.**

Calle de Montserrat Roig, 13 – 08520 Les Franqueses del Vallés – Barcelona – (Spain)
For more information, contact us at +34 93 544 47 08 or at inkema@inkema.com.

Inkema

RH16

Safety Elements.

- **Green LED safety indicator** on the control panel
- **Emergency Stop**
- **Fixed side toe guards**
- Safety **anti-fall valves**
- **Anti-slip surface**
- **Removable side guardrails**

RH16 Silent Control Panel

Polymer supports: allow silent operation

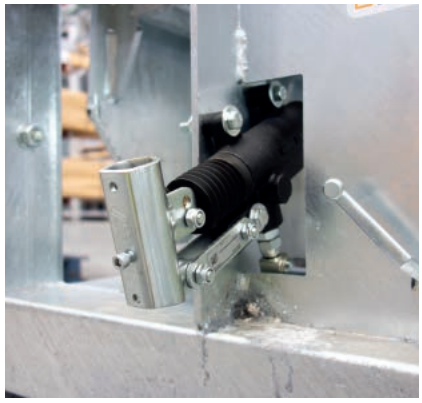

Manual operation in case of power failure

Fully pre-installed assembly:
Easy electrical connection

Dimensions.

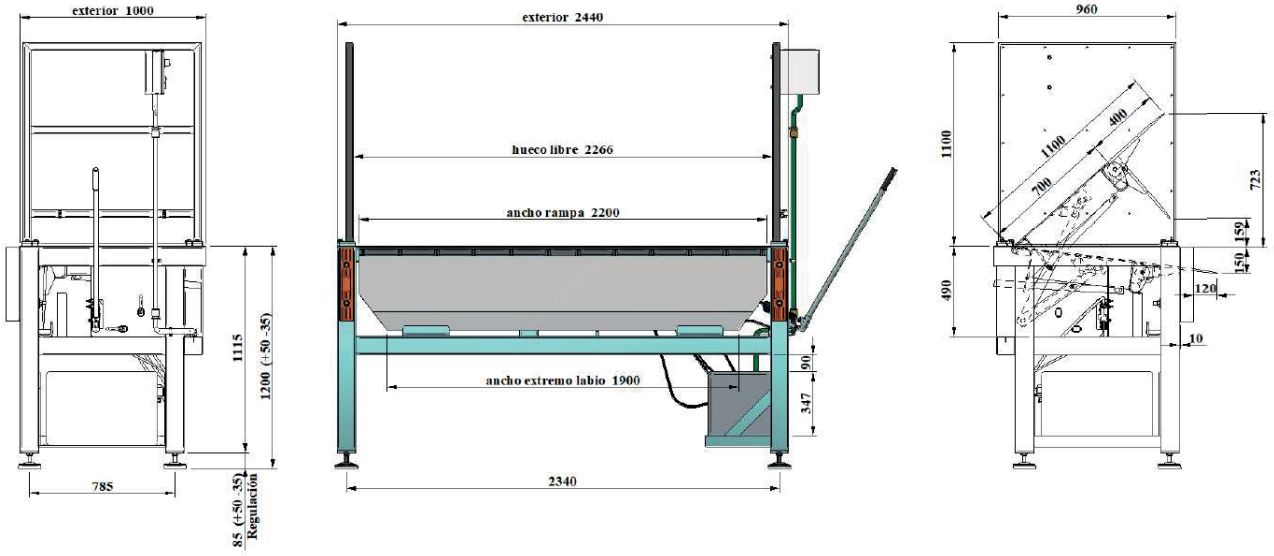

Finishes.

Painting:

Standard colour: RAL 7016 grey.
Any other colour from the RAL chart can be selected.

Galvanized:

Excellent resistance against corrosion and environmental agents.

Inkema

Calle de Montserrat Roig, 13 – 08520 Les Franqueses del Vallés – Barcelona – (Spain)
For more information, contact us at +34 93 544 47 08 or at inkema@inkema.com.